

Project \_\_\_\_\_

Item # \_\_\_\_\_

Quantity \_\_\_\_\_



GLOBE FOOD EQUIPMENT COMPANY

Manual Slicer

3600



# 3600 Manual Slicer

### Model

- 3600 - Manual Slicer



Made in the U.S.A.

### Standard Features

- Gear driven knife
- 1/2 HP knife motor, 7 amps
- Exclusive stainless steel construction
- Precision gear thickness adjustment
- Slices tissue thin up to 1 1/4" thick
- Built in antimicrobial protection
- Knife cover interlock
- Signature knife sharpening system
- 12" hollow ground knife
- Permanently attached knife ring guard
- Full gravity feed, 45° angle
- 3 lb. stainless steel end weight
- Cleaning brace to facilitate cleaning
- White on indicator light
- No voltage release
- 7 foot cord with molded plug

### Options and Accessories

- Prison package
- High moisture application package (includes stainless steel knife)
- 15" food chute in lieu of 12" chute
- Aluminum food chute in lieu of stainless steel chute
- Stainless steel knife in lieu of carbon steel
- Front mounted end weight assembly in lieu of standard end weight
- Slicer lift lever in lieu of cleaning brace
- End weight with meat prongs in lieu of standard end weight
- Low food fence
- High food fence
- 3" extension legs
- 10 lb. portion control scale
- Vegetable hopper
- Slicer cover

### Standard Warranty

- 2 years parts and 1 year labor plus 15 years on the gears

Approved By: \_\_\_\_\_

Date: \_\_\_\_\_



**GLOBE FOOD EQUIPMENT COMPANY**  
www.globeslicers.com

2153 Dryden Rd  
Dayton, OH 45439  
Phone: 937-299-5493  
Phone: 800-347-5423  
Fax: 937-299-4147



## Specifications

**Finish:** Exclusive #304 stainless steel base with radiused corners improves sanitation and durability. Other stainless steel parts include the food chute, slicer table, end weight, and knife cover.

**Knife Motor:** Powerful 1/2 HP, 115/60/1, 7 amp, air cooled, permanently lubricated sealed ball bearings. Solid state start relay. Special voltage motors available (single phase only). Contact factory.

**Knife Drive:** Cross axis helical gear drive design. This positive drive design assures nonslip, trouble free operation.

**Slice Thickness:** Precision gear adjustment holds thickness setting for consistent cuts and allows hot or cold foods to be sliced from tissue thin up to 1 1/4" thick.

**Antimicrobial Protection:** Table adjustment knob, on/off tab, sharpener cover knob, end weight handle, and food chute handle have antimicrobial protection built in.

**Full Gravity Feed:** Full 45° angle feed requires less mechanical pressure. Equipped with a 3 lb. stainless steel end weight to minimize waste and hold product. The end weight swings away for storage behind chute. The food chute handle is ergonomically designed.

**On/Off Tab:** Moisture protected toggle type, operated by a push-pull rod.

**Cleaning Brace:** A metal brace under the slicer drops into position, tilting the slicer to facilitate safe and easy cleaning underneath the slicer.

**Knife Cover Interlock:** Slicer will not operate with knife cover removed.

**Knife Ring Guard:** Permanently mounted knife ring guard protects the non-slicing portion of the knife. Slicer table protects leading edge of knife when completely closed.

**Top Mounted Sharpener:** Sharpener is made of all metal and is permanently mounted on the slicer. A single lever activates the large grinding and honing stones.

**Hollow Ground Knife:** Nominal 12" diameter special hardened steel alloy with stain resistant finish and sanitary hub.

**No Voltage Release:** Prevents inadvertent reactivation of slicer in the event of power or interlock interruption. Operator must restart the slicer.

**Capacity:** 8.75" H x 12.5"W or 7.5" Dia. (22.2cm x 31.8cm or 19cm)

**White On Indicator Light:** A readily visible light illuminates when knife is rotating.

**Cord & Plug:** Attached 7 foot flexible 3 wire cord with molded plug fits a grounded receptacle.

### Dimensions:


Foot Print = 14" x 21.62"  
(35.6 cm x 54.9 cm)  
Overall Length = 25" (63.5 cm)  
Overall Width = 21.5" (54.6 cm)  
Overall Height = 20.5" (52.1 cm)  
Freight Class: 77.5  
Net Weight: 103 lbs. (47 kgs.)  
Shipping Weight: 135 lbs. (61.1 kgs.)  
Shipping Dimensions:  
28"W x 25"D x 28"H  
(71.1 cm x 63.5 cm x 71.1 cm)

### Factory Installed Options:

- LONGCHUTE** 15" food chute
- SSK** Stainless steel knife
- FMEW** Front mounted end weight
- ALUM** Aluminum food chute
- MEATROOM** High moisture application package
- PRISON** Prison package
- PRONGS** End weight with meat prongs
- LEVER** Slicer lift lever

### Accessories:

- 1326** High fence (12" x 3")
- 1047** Low fence (12" x 1 3/8")
- 873-SET** 3" extension legs
- PS10** 10 lb. Portion control scale
- 699-AS** Vegetable hopper
- SC-GLOBE** Slicer cover

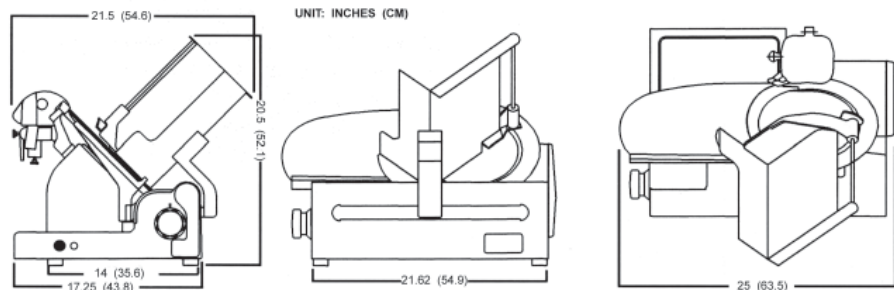

**GLOBE FOOD EQUIPMENT COMPANY**  
www.globeslicers.com

2153 Dryden Rd  
Dayton, OH 45439  
Phone: 937-299-5493  
Phone: 800-347-5423  
Fax: 937-299-4147

Printed in U.S.A. 10-2006